



Recyclable



JOINTING COMPOUND (CEMENT BOARD)



DESCRIPTION

KINGDOM JOINTING COMPOUND (CEMENT BOARD) is a high performance, water-based acrylic paste that exhibits minimal shrinkage & excellent adhesion to cement substrates. Its flexible nature and ease of workability provides you with a crack-free and smooth finish application.

It is also used to cover embedded fastener points and to level any minor irregularities or blemishes on surfaces. The delicate nature of the compound gives it a creamy & smooth texture that can be easily spread by hand and mechanical tools with zero or minimum sanding required after it hardens.

SPECIFICATION

PAIL / BUCKET	25 kg
FOR JOINTING FINISHING	25 kg, Covers approximately 163 ft (49.68 m)
FOR TEXTURING	25 kg, Covers approximately 195 ft ² (18.11 m ²)

* Coverage will vary depending on the condition of the surface and site conditions.

PREPARATION

- Store KINGDOM JOINTING COMPOUND (CEMENT BOARD) at room temperature for 24 hours prior to the application. Stir content lightly, do not add water.
- Use directly from the container when use for covering embedded fasteners, corner beads and trims.
- Do not add in any other material.
- Keep container covered when not in use. Keep away from direct exposure to sunlight.

INSTRUCTION



1. Apply **Jointing Compound (Cement Board)** only on dry surfaces.




3. Keep air to the minimum, joint compound surface temperature 26/30 °C within working area until joint are completely dry.



2. Apply thoroughly and allow each coat to dry before apply the next.

APPLICATION

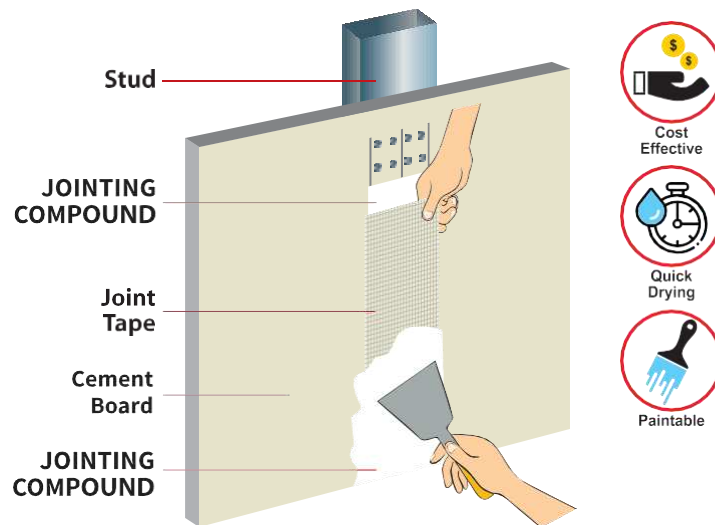

HEALTH & SAFETY

KINGDOM JOINTING COMPOUND (CEMENT BOARD) is not hazardous based on the major compound. However, we do recommend workers shall use safety equipment where necessary. In case of eye contact, immediately hold eyelids apart and flush eye continuously with running water. Get medical aid immediately when necessary.

Note: The information of applications and suggestions for use is based on practical experience. As due to various site conditions and unable to control the applications, therefore no responsibility can be accepted by us for any loss and damaged as this data sheet is for general guidance only.

Note: We reserve the rights to revise any data without prior notice.



Lot 8600, Batu11, Jalan Segenting,
Telok Panglima Garang, 42500 Selangor.

Tel: 603- 3122 8505/8515
Fax: 603- 3122 9505
HP: 6012- 3315160